




RL-62-E-H-BK-P41-N-0

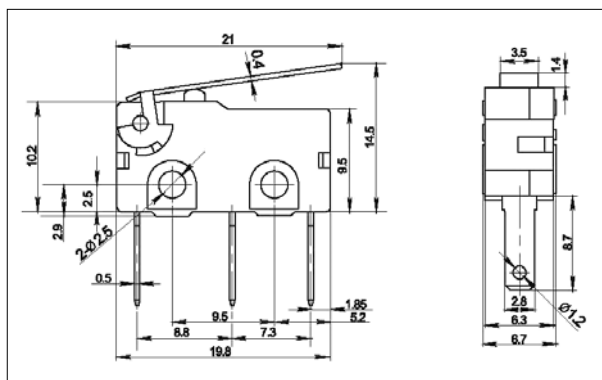

(G): 6A 125V/250VAC
6A 250VAC T85 1E4

(H): 10A 125V/6A 250VAC T85 1/4HP 125VAC
10A 250VAC T85 1E4

Mechanical life: 1E6 cycles
In-house test

RL-62

RL-62		D	G	BK		P31	O	K		
Function		Rating		Cap colour / Housing		Terminals	Lever Type		Operating Force	
D	(ON)-OFF 2P	G	6A 125/250 VAC 6A 250 VAC	WT	White		0	Not Applicable	K	60 ± 15 gf
E	ON-(OFF) 2P		BK	Black		L	100 ± 20 gf			
F	(ON)-ON 3P	H	10A 125 VAC 10A 250 VAC	GE	Grey		2		M	150 ± 30 gf
				3		N	250 ± 50 gf			
							4			
							5			
							...			